

# LED CEILING LAMP

H-32/H-33




Please read instructions before commencing installation and retain for future reference.



### Connecting the Terminal Block

Connect main supply (brown - live, blue - neutral, green/yellow - earth) into terminal block making sure all connections are tight.

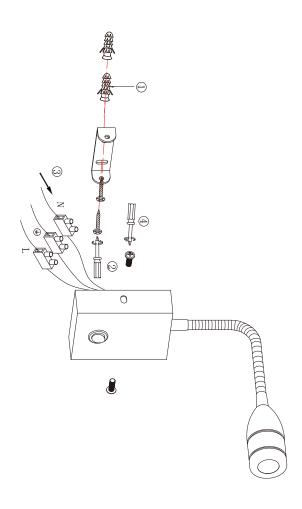

#### **SPECIFICATIONS:**

- **Fitting:** Aluminium
- Lamp type: LED 3W 3000K(INCLUDED)
- Protection against electric shock: CLASS I,. Requires earth connection.
- Ingress Protection: IP20. Protection against entry of solid objects greater than 12mm in diameter.
- Quality/Corrosive rating: QC21: Burning period: 12hrs/24hr cycle. Commercial use, indoor mainly - painted or plated metals. Not for use in corrosive environments.

## **INSTALLATION INSTRUCTIONS:**

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

Ensure mains supply is switched off.

- Insert masonry plugs (1) into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (2).
- Connect main supply wires to terminal block (3) making sure all connections are tight.
- Fit ceiling cup onto mounting bracket with screws (4).
- Reconnect power.

#### **WARNING:**

Not for outdoor use or in wet conditions.









